
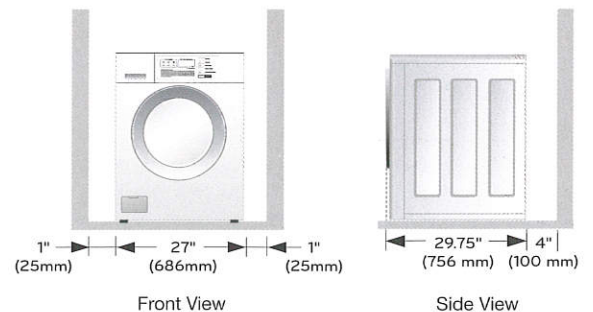


Giant-C Front Load Washer

		Non-Heater Type	Heater Type
CYLINDER			
Drum volume	cu.ft (ℓ)	4.2 (102.7)	4.2 (102.7)
Diameter	in.(mm)	22.05 (560) *	22.05 (560)
Depth	in.(mm)	16.51 (419.3)	16.51 (419.3)
Capacity	kg/lb	10.2/22.5	10.2/22.5
DIMENSIONS			
Product (WxHxD)	in. (mm)	27 (686) x 38.70 (983) x 29.75 (756)	27 (686) x 38.70 (983) x 29.75 (756)
With Door Opening	in. (mm)	50.81 (1291)	50.81 (1291)
Carton (WxHxD)	in. (mm)	29.72 (755) x 44.37 (1127) x 31.30 (795)	29.72(755) x 44.37(1,127) x 31.30(795)
Weight (Product/Carton)	lb (kg)	191 (87)/205 (93)	191 (87)/205 (93)
SPEED			
Wash	RPM	45	45
Extract (High Speed)	RPM	1,150	1,150
G-force	G	413	413
ENERGY			
Electric Ratings	V/Hz/A	120/60/5 220~240/50/5 220/60/5	220~240/50/15~17.5
WATER USAGE			
Water Consumption	ℓ	42.4	86
NOISE & CYCLE TIME			
Noise Level (Sound Power)	dB	Lower than 62	Lower than 62
Program Duration in Minutes (Default)	min	37	60 (60°C program)
SYSTEM & CONTROL			
Inverter Direct Drive Motor		•	•
Intelligent Electronics Controls		•	•
Heating System	W	-	3,200
3 Compartment Dispenser		•	•
Forced Drain System		•	•
Pricing Program		Special Vended Price	Special Vended Price
WASH PROGRAMS			
Program List		WHITES (Hot)	90°C MEDICAL
		COLORS (Warm)	75°C HOT
		PERM.PRESS (Warm)	60°C NORMAL
		DELICATES (Cold)	40°C NORMAL
		ADD SUPER WASH (Option)	COLD
		-	DELICATES *RINSE+SPIN
CONVENIENCE FEATURES			
End of Cycle Beeper		•	•
Door Lock Display		•	•
Self Diagnosis		•	•
Auto Balancing		•	•
Auto Suds Removal		•	•
Forced Drain System		•	•
Remaining Time Display		•	•
Status Indicator		•	•
4 Adjustable Leveling Legs		•	•
LoDecibel Quiet Operation		•	•
Coin Box Open Sensing		•	•
EXTERNAL FINISH			
Drum		NeveRust™ Stainless Steel Drum	NeveRust™ Stainless Steel Drum
Top Plate		Porcelain (Single)/Painted Steel (Stack)	Porcelain (Single)/Painted Steel (Stack)
Transparent Glass Window Door		•	•
Colors		Bluish White	Bluish White/Stone Silver
Cabinet		Painted Steel	Painted Steel
Control Panel		Steel	Steel
Window Display		Silk Screen	Silk Screen
Window		Aluminum	Aluminum
CIRCUIT PROTECTION			
PCB Fuse - Main Control Board	amps	8 (220~240V) 12 (120V)	8 (220~240V)
PCB Fuse - Filter Assembly	amps	15	15

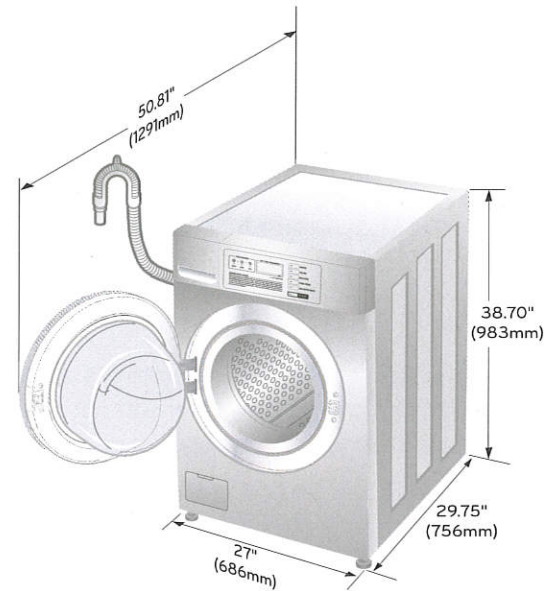

PRODUCT TYPE


	Non-Heater Type	Heater Type
COIN TYPE	Single F1069FD4 (GCW1069QS)	-
	Stack F1069FD (GCW1069QD)	-
CARD TYPE	Single F1069FD7 (GCW1069CS)	-
	Stack F1069FD6 (GCW1069CD)	-
ON PREMISE TYPE	Single F1069FD3 (GCW1069LS)	F1069FD3S
	Stack F1069FD2 (GCW1069LD)	F1069FD2S



* Dimensions and weights are approximate. Design, features and specifications subject to change without notice. Some models may not be available for sales in certain countries.

When you choose LG's Commercial Laundry System, you get a total laundry solution package, which includes the most suitable equipment and full support for your business.

Giant-C Dryer

MODEL NUMBER		Gas Type	Electric Type
CYLINDER			
Drum Volume	cu.ft (ℓ)	7.1 (201)	7.1 (201)
Diameter	in.(mm)	26.1 (663) *	26.1 (663)
Depth	in.(mm)	22.46 (570.6)	22.46 (570.6)
Capacity	kg/lb	10.2/22.5	10.2/22.5
DIMENSIONS			
Product (WxHxD)	in. (mm)	27 (686) x 38.70 (983) x 30.08 (764)	27 (686) x 38.70 (983) x 30.08(764)
With Door Opening	in. (mm)	49.8 (1264)	49.8 (1264)
Carton (WxHxD)	in. (mm)	29.92 (760) x 46.06 (1170) x 31.30 (795)	29.92 (760) x 46.06 (1170) x 31.30 (795)
Weight (Product/Carton)	lb(kg)	130 (59)/143 (65)	130 (59)/143 (65)
OPERATION			
Electric Ratings	V/Hz/amps	120/60/5	120(240)/60/26
		220-240/50/2.35	220-240/50/22.5
		220/60/3	220/60/21
Heating Type		-	240/50/19.5
Type of Drying		Gas	Electric
		Ventilation	Ventilation
		0.42 (120V/ 60Hz)	0.42 (120V/60Hz)
Motor	KW	0.32 (220-240V/ 50Hz)	0.32 (220-240V/50Hz)
		0.4 (220V/ 60Hz)	0.4 (220V/60Hz)
Gas Ratings	KW	5.8 (EU) ¹⁾	-
Heating Element	W	-	5400 ²⁾
Program Duration in Minutes (Default)	min	45	45
CONNECTIONS			
Air Outlet Diameter	in.(mm)	4 (100)	4 (100)
Exhaust Airflow Diameter	in.(mm)	4 (100)	4 (100)
SYSTEM & CONTROL			
Pricing Program		Special Vended Price	Special Vended Price
Intelligent Electronic Controls		•	•
DRY PROGRAMS			
White & Colors		•	•
Perm. Press		•	•
Delicates		•	•
No Heat		•	•
CONVENIENCE FEATURES			
End of Cycle Beeper		•	•
Heater Type		-	Multi-level control
Gas Valve Type		on/off	-
Reversible Door		•	•
Remaining Time Display		•	•
Self Diagnosis		•	•
Status Indicator		•	•
4 Adjustable Leveling Legs		•	•
Coin Box Open Sensing		•	•
EXTERNAL FINISH			
Top Plate		Porcelain (Single)/Painted Steel (Stack)	Porcelain (Single)/Painted Steel (Stack)
Transparent Glass Window Door		•	•
Colors		Bluish White/Stone Silver	Bluish White/Stone Silver
Cabinet		Painted Steel	Painted Steel
Control Panel		Steel	Steel
Window Display		Silk Screen	Silk Screen
Window		Aluminum	Aluminum

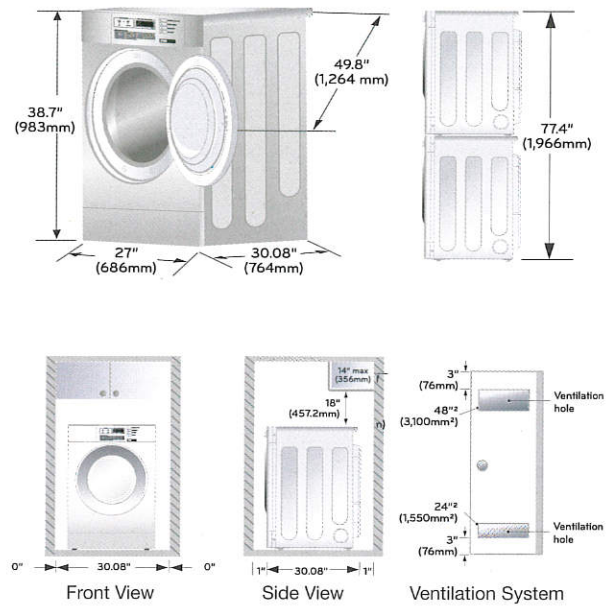

Weather Hood Type	Number of 90° Elbows	Maximum length of 4" (10.2cm) diameter rigid metal duct	Maximum length of 4" (10.2cm) diameter flexible metal duct
Recommended 	0	65 feet (19.8 m)	45 feet (13.7 m)
	1	55 feet (16.8 m)	35 feet (10.7 m)
	2	47 feet (14.3 m)	30 feet (9.1 m)
	3	36 feet (11.0 m)	25 feet (7.6 m)
Use Only for Short Run Installations 	0	55 feet (16.8 m)	35 feet (10.7 m)
	1	47 feet (14.3 m)	27 feet (8.2 m)
	2	41 feet (12.5 m)	21 feet (6.4 m)
	3	30 feet (9.1 m)	17 feet (5.2 m)
	4	22 feet (6.7 m)	15 feet (4.5 m)

PRODUCT TYPE

	Electric Type	Gas Type
COIN TYPE	Single RV1329AN4(S) (GD1329QES)	RN1329AN4(S) (GD1329QGS)
	Stack RV1329AN1(S) (GD1329QED)	RV1329AN7 (GD1329QEU)
	RV1329AN7S (GD1329QEW)	RN1329AN1(S) (GD1329QGD)
	RV1329AN7 (GD1329QGU)	RN1329AN7S (GD1329QGW)
CARD TYPE	Single RV1329AD1(S) (GD1329CES)	RN1329AD1(S) (GD1329CGS)
	Stack RV1329AD6(S) (GD1329CED)	RN1329AD6(S) (GD1329CGD)
	RV1329AD5 (GD1329CEU)	RN1329AD5 (GD1329CGU)
	RV1329AD5S (GD1329CEW)	RN1329AD5S (GD1329CGW)
ON PREMISE TYPE	Single RV1329A4(S) (GD1329LES)	RN1329A4(S) (GD1329LGS)
	Stack RV1329A1(S) (GD1329LED)	RN1329A1(S) (GD1329LGD)
	RV1329A7 (GD1329LEU)	RN1329A7 (GD1329LGU)
	RV1329A7S (GD1329LEW)	RN1329A7S (GD1329LGW)

* Dimensions and weights are approximate. Design, features and specifications subject to change without notice. Some models may not be available for sales in certain countries.