

PROFESSIONAL HIGH SPEED WASHING MACHINES



CHARACTERISTICS

- Floating washing machines with high centrifugation, without the need for anchoring to the floor.
- Detergent tray with 4 compartments.
- 2 standard water inlets.
- Equipped with frequency converter (standard) 50-60 Hz). Balancing system controlled by the same drive.
- Model with drain valve (V) and model with drain pump (P).
- Model with valve specially designed for washing mops.
- Includes levelling feet.
- CE and WRAS product certifications.


OPTIONS

- Double drain (valve model only).
- Drainage pump kit.
- Normally closed drain (N.C.). In the event of a power failure, the water is kept in the tank.
- 6 extra signals for dosing; total of up to 14 available.
- Silicone gasket-door.
- Door with opposite opening.
- Delayed opening of the door due to power failure.
- Stainless steel cabinet AISI 304.

- Prepared for remote connections.
- (Wifi, Ethernet...)
- Base for easy access to the machine.
- Special base for mops (with filter) - Valve models only.
- Base and water recovery tank.
- Kits for self-service: Payment centre, file, purse.
- Voltage 110 1N 50/60 Hz.
- Voltage 440 3~ (No N) 50/60 Hz.

TECHNICAL DATA

	UNIT	LAP-08 TP2 V	LAP-08 TP2 P	LAP-TP2 10 V	LAP-10 TP2 P
DRUM					
Load capacity (KG) 1:9 / 1:10	Kg	9/8	9/8	11/10	11/10
Volume	l	80	80	100	100
Diameter	mm	532	532	532	532
Depth	mm	360	360	425	425
TECHNICAL DATA					
Speed of washing - Speed of centrifugation	r.p.m.	50/ 1,250	50/ 1,250	50/ 1,250	50/ 1,250
"G" factor	-	450	450	450	450
Self-service version	-	Yes	Yes	Yes	Yes
Double drain	-	Yes	No	Yes	No
Weighing system / Dump system	-	No	No	No	No
DOOR					
Door centre high - Door base high	mm	537/280	537/280	537/280	537/280
Diameter	mm	373	373	373	373
DYNAMIC FORCE					
Static load	KN	1,4	1,4	1,5	1,5
Maximum dynamic load	KN	0,5	0,5	0,6	0,6
Maximum vertical load	KN	0,64	0,64	0,75	0,75
Maximum revolutions	r.p.m.	1,250	1,250	1,250	1,250
Dynamic load frequency	-	18,33	18,33	18,33	18,33
POWER					
Motor	kW	0,75	0,75	0,75	0,75
Electric Heating mod.	kW	6	6	6	6
Hot water heating	kW	0	0	0	0
Maximum elec. power	kW	6,25	6,25	6,25	6,25
Maximum power Hot water mod.	kW	0,75	0,75	0,75	0,75
Maximum power Steam mod.	kW	No	No	No	No
CONNECTIONS					
Water inlet	inch	3/4"	3/4"	3/4"	3/4"
Drain	mm/inch	2"	1" (Pump)	2"	1" (Pump)
DIMENSIONS / DIMENSIONS WITH PACKAGING					
Width	mm	680/710	680/710	680/710	680/710
Depth	mm	698/832	698/832	772/832	772/832
Height	mm	1,040/1,130	1,040/1,130	1,040/1,130	1,040/1,130
Net weight - Gross weight	kg	140/150	140/150	140/150	150/160

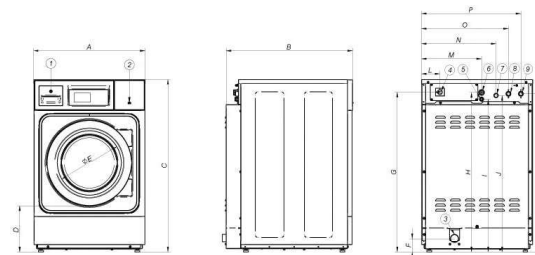

01. Soap dish
02. USB port
03. Drain Valve / Drain Pump
04. Main switch
05. Electrical connection liquid soap pumps
06. Electrical connection
07. Inlet for liquid soap
08. Cold water inlet
09. Hot water inlet
10. Base height 389 mm

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q
LAP-08 V	680	698	1040	278	373	86	964	962	922	944	954	110	366	453	528	603	159
LAP-08 P	680	698	1040	278	373	-	964	962	922	944	954	110	366	453	528	603	-
LAP-10 V	680	772	1040	278	373	86	964	962	922	944	954	110	366	453	528	603	199
LAP-10 P	680	772	1040	278	373	-	964	962	922	944	954	110	366	453	528	603	-

PROFESSIONAL TUMBLE DRYERS



CHARACTERISTICS

- Professional tumble dryers of 8 and 10 kg of capacity.
- Robust construction, grey skinplate panels.
- Aluminium industrial door with large diameter.
- Models with digital programmer M also convertible for self-service.
- Versatile and easy to set up for self-service.
- Stackable on top of the washing machine or tumble dryer with the programmer on the underside, (between the two drums).


- Large drawer filter, not on the door.
- Electric heating with two possible configurations: 4,5 or 6,75 kW.
- Easy access to components for easy maintenance.
- Voltage 230V I.

OPTIONS

- Versatile model convertible to self-service.
- Stackable option on top of the washing machine or other tumble dryer by changing the control to the bottom of the drum.
- AISI 304 stainless steel panels.
- Base for more ergonomics.
- Other voltages and frequencies: 110V, 60 Hz.

TECHNICAL DATA

	UNIT	SRP-08 M	SRP-10 M
CAPACITY AND DRUM			
Capacity	Kg	8	10
Volume	l	160	200
Drum diameter	mm	590	590
Drum depth	mm	585	590
DOOR			
Centre height charging hole	mm	545	545
Base height charging hole	mm	250	250
Door diameter	mm	588	588
GENERAL DATA			
Control	-	ELECTRONIC	ELECTRONIC
USB connection	-	No	No
Construction	-	Skinplate panels	Skinplate panels
Base	-	OPC	OPC
Self-service version	-	Yes	Yes
POWER			
Motor	kW	0,37	0,37
Electric heating	kW	6,75	6,75
CONNECTIONS			
Smoke evacuation	mm	100	100
Air flow	m ³ /hour	No	No
DIMENSIONS / DIMENSIONS WITH PACKAGING			
Width	mm	680 / 710	680 / 710
Depth	mm	712 / 832	775 / 832
Height	mm	1040 / 1130	1040 / 1130
Net weight - Gross weight	kg	60 / 65	65 / 70

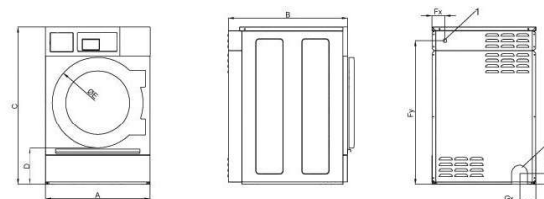

- 01. Electric connection
- 02. Exhaust outlet

	A	B	C	D	E	Fx	Fy	Gx	Gy
SRP-8	680	722	1040	250	588	85	950	108	90
SRP-10	680	775	1040	250	588	85	950	108	90